


BRAIDED FLEXIBLE CONNECTOR - FLANGED

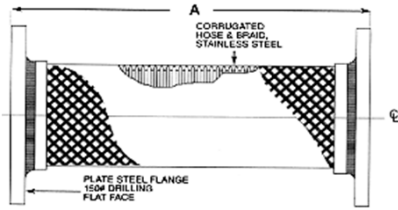


Materials	
Fittings	150# Flange Carbon Steel
Inner Hose	321 Stainless Steel
Braid	304 Stainless Steel

For Temperatures Above 70° F						
Temp °F	70	200	300	400	500	600
Factor	1.00	0.92	0.86	0.82	0.77	0.73

The three stocked lengths: short, medium, and long, as shown below

Dimensions			Pressure At 70°F	Lateral Movement	Product No.
Size	Model	Length A			
in	S/M/L	in	psi	in	
2.5	S	9	345	1/8	FFSC0250
2.5	M	10.25	345	3/8	FFMC0250
2.5	L	12	345	3/4	FFLC0250
3	S	9	289	1/8	FFSC0300
3	M	10.625	289	3/8	FFMC0300
3	L	14	289	3/4	FFLC0300
4	S	9	300	1/8	FFSC0400
4	M	11.75	300	3/8	FFMC0400
4	L	16	300	3/4	FFLC0400
5	S	11	220	1/8	FFSC0500
5	M	13.625	220	3/8	FFMC0500
5	L	18	220	3/4	FFLC0500
6	S	11	200	1/8	FFSC0600
6	M	14.125	200	3/8	FFMC0600
6	L	20	200	3/4	FFLC0600
8	S	12	190	1/8	FFSC0800
8	M	15.375	190	3/8	FFMC0800
8	L	22	190	3/4	FFLC0800
10	S	13	150	1/8	FFSC1000
10	M	17.75	150	3/8	FFMC1000
10	L	24	150	3/4	FFLC1000
12	S	14	125	1/8	FFSC1200
12	M	18.375	125	3/8	FFMC1200
12	L	26	125	3/4	FFLC1200
14	S	14	105	1/8	FFSC1400
14	M	20	105	3/8	FFMC1400

 <p>"Flexible Piping Solutions"</p> <p>PRINT CERTIFICATION: Certified Correct As Of: _____ By: _____</p>	Proposal/Inquiry/Order No.: _____	NOTES:
	Customer Name: _____	
	Project Name: _____	
	Contractor: _____	
	Flexicraft connectors combine excellent performance and economy. They are usually stocked.	