


PT1 CLEAR FABRIC REINFORCED PVC TUBING

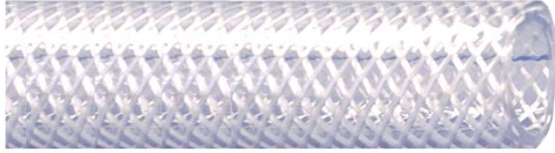


The Model PT1 is a clear PVC polyester yarn braid reinforced tubing with a smooth interior, which provides excellent flow characteristics. Applications are varied, and include a variety of weak chemicals and gases, including food products.

FDA, USDA, 3A and NSF grade. 25F to 150F.

QTY	INNER DIA	OAL	FITTINGS	OUTER DIA	PRESSURE	COIL LENGTH	WEIGHT
	(in)	(ft)		(in)	(psi)	(feet)	(per reel)
	3/16			3/8	250	300	0.04
	1/4			1/2	350	300	24
	5/16			17/32	250	300	0.08
	3/8			19/32	225	300	0.09
	1/2			3/4	200	300	0.13
	5/8			7/8	200	300	0.18
	3/4			1 1/32	150	300	0.22
	1			1 5/16	125	200	0.30
	1 1/4			1 11/16	100	100	0.23
	1 1/2			1 15/16	100	100	0.32
	2			2 1/2	75	100	0.47

NOTES: *THE HOSE IS RATED FOR 25 TO 150 DEG F. HIGHER TEMPERATURES THAN 70F AFFECT PRES. RATING. AVAILABLE IN METRIC SIZES.

CUSTOMER _____ PROJECT _____ ENGINEER _____ CONTRACTOR _____ CERTIFICATION _____	 "Flexible Piping Solutions"				
	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MODEL:</td> <td style="width: 50%; text-align: center;">PT1</td> </tr> <tr> <td>DRAWN BY:</td> <td style="text-align: center;">CLEAR FABRIC REINFORCED PVC</td> </tr> </table>	MODEL:	PT1	DRAWN BY:	CLEAR FABRIC REINFORCED PVC
MODEL:	PT1				
DRAWN BY:	CLEAR FABRIC REINFORCED PVC				
	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">PDB 8/04</td> <td style="width: 50%;"></td> </tr> </table>	PDB 8/04			
PDB 8/04					