



TEFSPOOL PTFE LINED RUBBER EXPANSION JOINT

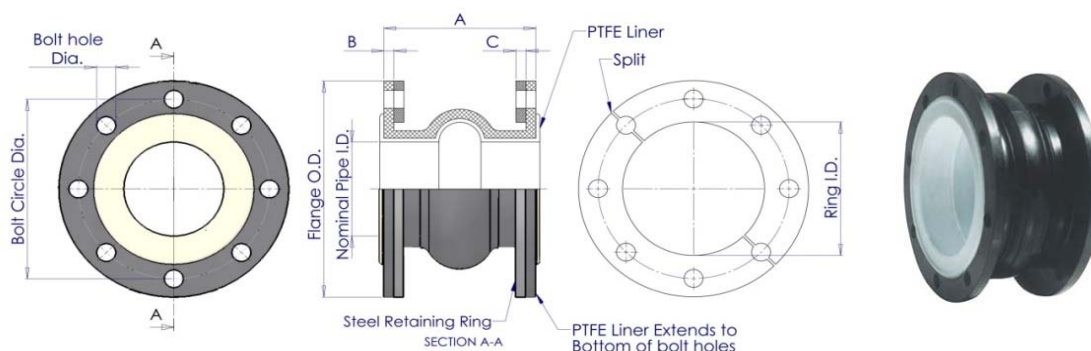

The Tefspool expansion joints are designed for industrial corrosive chemical applications, with an integral PTFE liner and EPDM rubber. It is used in many industrial applications, including those in the pulp and paper, where the need to resist corrosive attack at higher pressures is paramount. Rated to 250F.

Size	Dimensions			Pressure / Vacuum		Movement				Physicals		Wt lbs	Product No.
	A OAL	Rbr Flg	Ret Ring			Axial Com	Axial Ext	Later al	Ang	Spring Rate	Eff Area		
	in	in	in	psi	hg	in	in	in	deg	lbs/in	in ²		
1.5	6	0.47	0.38	225	30	1.25	0.625	0.625	28	400	1.8	4	USL1ET0150
2	6	0.47	0.38	225	30	1.25	0.625	0.625	25	425	3.1	6	USL1ET0200
2.5	6	0.47	0.38	225	30	1.25	0.625	0.625	20.2	50	4.9	7	USL1ET0250
3	6	0.47	0.38	225	30	1.25	0.625	0.625	18	574	7.1	8.5	USL1ET0300
4	6	0.47	0.38	225	30	1.25	0.625	0.625	14.2	480	12.6	12	USL1ET0400
5	6	0.55	0.38	225	30	1.25	0.625	0.625	13	500	19.6	13.5	USL1ET0500
6	6	0.55	0.38	225	30	1.25	0.625	0.625	12.2	457	28.3	1635	USL1ET0600
8	6	0.63	0.38	210	30	1.25	0.625	0.625	12	714	50.3	25.5	USL1ET0800
10	8	0.63	0.38	210	30	2	1	1	11.9	1042	78.5	36	USL1ET1000
12	8	0.75	0.38	210	30	2	1	1	11.3	1583	113.1	43.5	USL1ET1200
14	8	0.87	0.38	150	30	2	1	1	11.5	1724	153.9	55	USL1ET1400
16	8	0.87	0.38	150	30	2	1	1	10.1	1947	201.1	77.5	USL1ET1600
18	8	0.87	0.38	150	30	2	1	1	8.9	2393	254.5	83	USL1ET1800
20	8	0.98	0.38	150	30	2	1	1	8.1	2605	314.2	92	USL1ET2000
24	10	0.98	0.38	110	28	2	1	1	9	2850	452.4	108	USL1ET2400

 Flexible Piping Solutions PRINT CERTIFICATION: Certified Correct As Of: _____ By: _____	Proposal/Inquiry/Order No.	NOTES:
	Customer Name:	
	Project Name:	
	Contractor:	
	compensators by Flexicraft combine excellent performance and economy. They can usually be provided quickly.	