



BRAIDED FLEXIBLE CONNECTOR - CSA

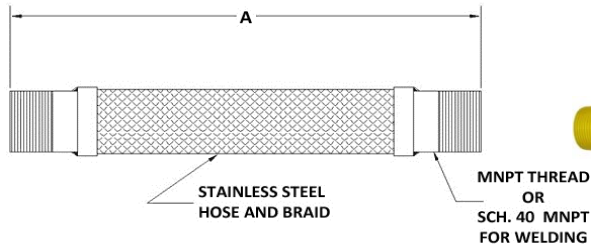

Flexicraft provides a braided metal connector with CSA / AGA approval. These connectors are available up to 4" diameter, and with thread or weld ends. These flexible connectors are resistant to corrosion. They are perfect for preventing lateral offsets from causing possible gas leaks. These offsets can occur during installation, or over time with building or platform settling. For movement in any direction, especially seismic motions, see the CSA / AGA approved flexible ML Loops.

Materials	
Fittings	MNPT or Weld Ends, Carbon Steel
Inner Hose	321 Stainless Steel
Braid	304 Stainless Steel

Dimensions		Movements	Ends	Pressure	Product NO.
Size	Length				
in	in	in	MNPT/WELD	psi	
0.5	16.875	2	MNPT	150	AGATT0050
0.5	16.875	2	WELD	150	AGAWW0050
0.75	18.375	2	MNPT	150	AGATT0075
0.75	18.375	2	WELD	150	AGAWW0075
1	19.375	2	MNPT	150	AGATT0100
1	19.375	2	WELD	150	AGAWW0100
1.25	19.375	2	MNPT	150	AGATT0125
1.25	19.375	2	WELD	150	AGAWW0125
1.5	20.125	2	MNPT	150	AGATT0150
1.5	20.125	2	WELD	150	AGAWW0150
2	20.875	2	MNPT	150	AGATT0200
2	20.875	2	WELD	150	AGAWW0200
2.5	22.5	2	MNPT	150	AGATT0250
2.5	22.5	2	WELD	150	AGAWW0250
3	25.625	2	MNPT	150	AGATT0300
3	25.625	2	WELD	150	AGAWW0300
4	30.25	2	MNPT	150	AGATT0400
4	30.25	2	WELD	150	AGAWW0400

 <p>"Flexible Piping Solutions"</p> <p>PRINT CERTIFICATION: Certified Correct As Of: _____ By: _____</p>	Proposal/Inquiry/Order No.: _____	NOTES:
	Customer Name: _____	
	Project Name: _____	
	Contractor: _____	
	Flexicraft connectors combine excellent performance and economy. They are usually stocked.	