


SLIDEX3 GUIDE SUPPORT BOLT DOWN BASE

4371/2-
4384B

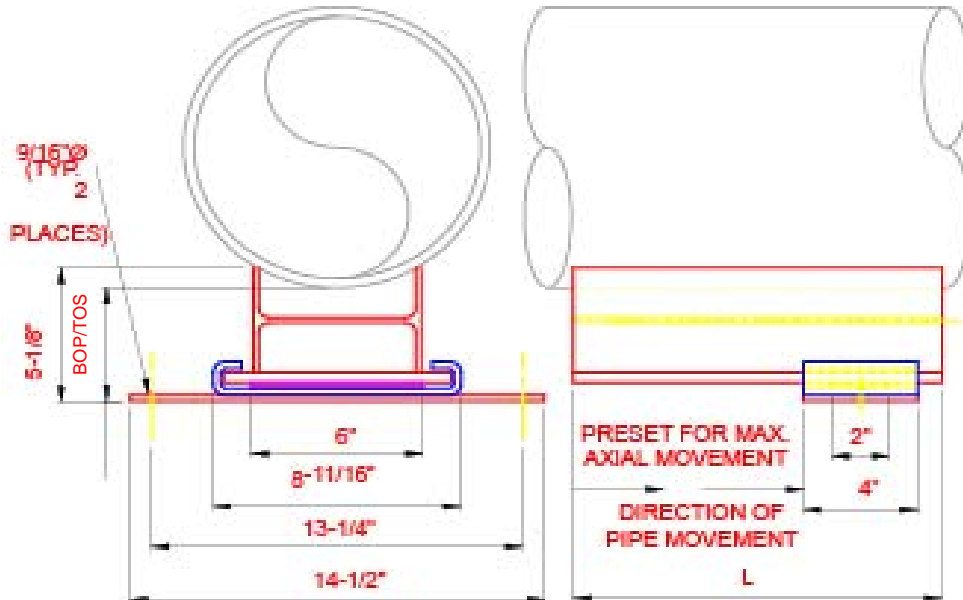

FOR PIPE DIAMETERS 10" THRU 24"

MODEL NO.	MOVEMENT	L	WEIGHT	MAXIMUM LOAD *
	(in)	(in)	(Lbs)	(Lbs)
SLDX3BS	4	6	16.4	24,000
SLDX3BL	10	12	26.3	24,000

* CORRECT THE MAX LOAD BASED ON THE TABLE BELOW.

TEMP DEG F	FACTOR
<70	1.00
100	0.85
200	0.55
300	0.40
400	0.25

DIA	BOP/TOS
10"	4 3/8"
12"	4 1/2"
14"	4 5/8"
16"	4 5/8"
18"	4 5/8"
20"	4 3/4"
24"	4 7/8"

- Notes:
- Material is carbon steel, with one coat shop paint.
 - Uses heat cured PTFE to permit unrestrained movement. Maintenance free.
 - Maximum insulation thickness: 3.5"
 - Maximum temperature: 400F.

www.flexicraft.com

CUSTOMER: _____
 PROJECT: _____
 ENGINEER: _____
 CNTRCTR: _____
 P.O. NO: _____

FLEXICRAFT 
 "Flexible Piping Solutions"

DESCRIPTION:
SLIDEX3 SLIDE GUIDE-BOLT DOWN BASE


DRAWN BY:
PB

DATE:
 03/17

DWG NO.:
SLIDEX2B

SLIDEX3 GUIDE SUPPORT WELD DOWN BASE

4371/2-
4384

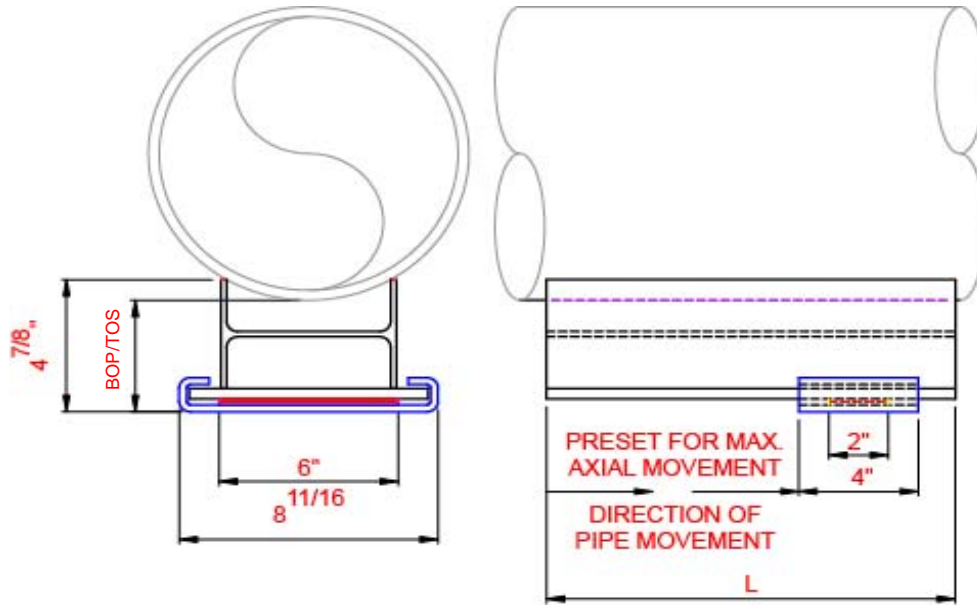

FOR PIPE DIAMETERS 10" THRU 24"

MODEL NO.	MOVEMENT	L	WEIGHT	MAXIMUM LOAD *
	(in)	(in)	(Lbs)	(Lbs)
SLDX3WS	4	6	12.3	24,000
SLDX3WL	10	12	22.2	24,000

* CORRECT THE MAX LOAD BASED ON THE TABLE BELOW.

TEMP DEG F	FACTOR
<70	1.00
100	0.85
200	0.55
300	0.40
400	0.25

DIA	BOP/TOS
10"	4 1/8"
12"	4 1/4"
14"	4 3/8"
16"	4 3/8"
18"	4 3/8"
20"	4 1/2"
24"	4 5/8"

- Notes:
- Material is carbon steel, with one coat shop paint.
 - Uses heat cured PTFE to permit unrestrained movement. Maintenance free.
 - Maximum insulation thickness: 3.5"
 - Maximum temperature: 400F.

www.flexicraft.com

CUSTOMER: _____
 PROJECT: _____
 ENGINEER: _____
 CNTRCTR: _____
 P.O. NO: _____



DESCRIPTION:
SLIDEX3 SLIDE GUIDE-WELD DOWN BASE

DRAWN BY:
PB

DATE:
 03/17

DWG NO.:
SLIDEX1W