



YIT2

Y-Strainer 250# Class Thread
CAST IRON




DEFAULT SCREEN SIZE (in)

Size	Liquid	Open Area
1/2 - 2	20 MESH	49%
2-1/2 - 4	.045 PERF	33%

PRESSURE RATING (psig) ANSI CLASS 250

W.O.G.	STEAM
400 @ 150 F	250 @ 400 F

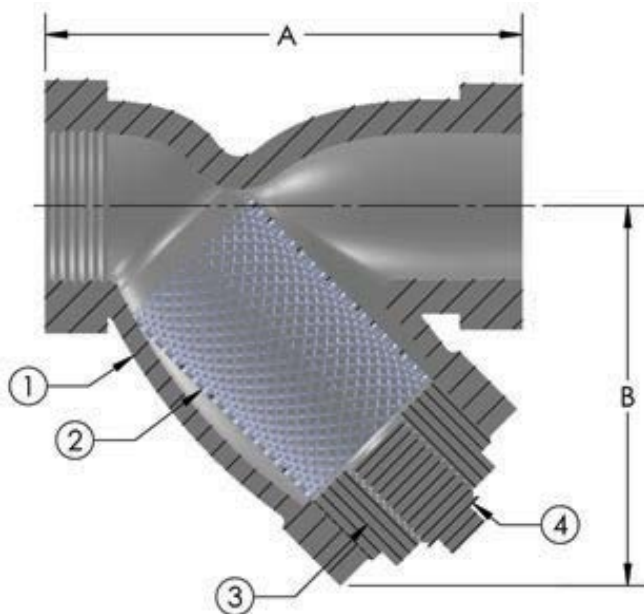

BILL OF MATERIALS

ITEM	DESCRIPTION	MATERIAL
1	Body	CAST IRON
2	Screen	304 STAINLESS STEEL
3	Cap	CAST IRON
4	Blow Off Plug	CAST IRON

DIMENSIONS (in) / PERFORMANCE

SIZE	A	B	BLOW-OFF PORT	Cv	Wt. (lb)
1/2	3-7/16	2-1/2	3/8	9.5	1.5
3/4	4	2-3/4	1/2	9.5	2.5
1	4-5/8	3-1/4	1/2	9.5	4.5
1-1/4	5-3/8	4	3/4	18.7	6.5
1-1/2	6	4-1/2	3/4	30.0	8.75
2	7-1/2	5-3/8	1	44.9	12.5
2-1/2	9	7-3/16	1-1/4	61.0	24
3	10	7-7/8	1-1/4	98.0	30